



Subject:

Performance data

Application: Refrigeration & AC


Refrigerant	R513A	Compressor refrigeration capacity	20.00 kW
Reference temperature	Dew point	Evaporator refrigeration capacity	20.00 kW
Power supply	50 Hz, 400 V	Power consumption	8.42 kW
Supply frequency	50 Hz	Current draw (400 V)	17.00 A
Evaporating temperature	-10.0 °C	Coefficient of performance (COP/EER)	2.38
<i>Evaporating pressure (abs.)</i>	<i>2.23 bar</i>	Condensing capacity	28.40 kW
Condensing temperature	45.0 °C	Mass flow	0.171 kg/s
<i>Condensing pressure (abs.)</i>	<i>12.17 bar</i>	Discharge end temperature	66.7 °C ¹⁾
Suction gas superheat	8 K		
Subcooling (outside cond.)	0 K		
Usable superheat	100%		

Preliminary capacity data.

-
- 1) The stated value of the discharge end temperature is a mere calculated value. Additional cooling and heat dissipation are not considered. Deviations (particularly in deep freezing applications) from the real measured discharge temperature during operation are possible.

Subject:

Operating limits

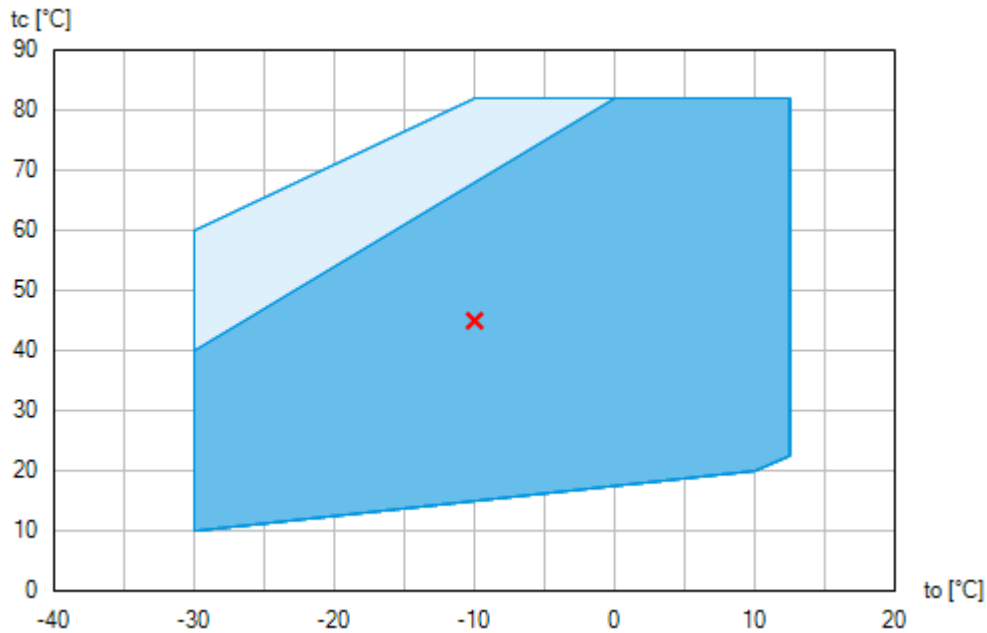

-  Unlimited application range
-  Supplementary cooling or reduced suction gas temperature ($\Delta t_{oh} < 20K$)

Compressor operation is possible within the limits shown on the diagrams of application. Please note the coloured areas. Compressor application limits should not be chosen for design purposes or continuous operation. Axis values refer to dew point (saturated vapour line).



Subject:

Technical data

Number of cylinders / Bore / Stroke	4 / 70 mm / 50 mm
Displacement 50/60 Hz (1450/1740 ¹ /min)	67,00 / 80,40 m ³ /h
Voltage ¹⁾	380-420V Y/YY -3- 50Hz PW
	440-480V Y/YY -3- 60Hz PW
Winding divided into	50% / 50%
Max. working current ²⁾	30.0 A
Max. power consumption ²⁾	17.8 kW
Starting current (rotor blocked) ²⁾	101.0 / 174.0 A
Motor protection	INT69 G
Protection terminal box	IP 66
Weight	171 kg
Frequency range ³⁾	25 - 70 Hz
Max. permissible overpressure (g) (LP/HP) ⁴⁾	19 / 28 bar
Connection suction line SV	42 mm - 1 5/8 "
Connection discharge line DV	28 mm - 1 1/8 "
Lubrication	Oil pump
Oil type R134a, R404A, R407A/C/F, R448A, R449A, R450A, R513A	BOCKlub E55
Oil type R22	BOCKlub A46
Oil charge	2,7 Ltr.
Oil sump heater	230 V - 1 - 50/60 Hz, 160 W
Dimensions Length / Width / Height	695 / 361 / 383 mm
Sound power level L _{WA} ⁵⁾	80 dB(A) @ -35 °C / +40 °C
	78 dB(A) @ -10 °C / +45 °C
Sound pressure level L _{pA} ⁵⁾	67 dB(A) @ -35 °C / +40 °C
	65 dB(A) @ -10 °C / +45 °C

1) Tolerance (± 10%) relates to the mean value of the voltage range. Other voltages and current types on request

All data are based on voltage rms values

PW = part winding, motors for part winding starting
 (no start unloaders required)
 Designs for Y/D on request

Subject to change without notice



Subject:

- 2) - The stated value for the max. power consumption is valid for the adjusted power supply.
 - Starting current (rotor blocked):
 - Part winding (PW) motors: Winding 1 / Winding 1+2
 - Delta/Star (Δ/Y) motors: Δ / Y
 - Take account of the max. operating current / max. power consumption for designing motor contractors, feed lines, fuses and motor protection switches. Motor contractors: Consumption category AC3.
- 3) The maximum permissible working current of the compressor (I_{max}) must not be exceeded. Take account of the guidelines for use of frequency inverter (see compressor assembly instruction or selection software).
- 4) LP = Low pressure
HP = High pressure
- 5) Declared dual-number noise emission values are in accordance with ISO 4871. The corresponding uncertainty to the sound power level is $K_{WA} = 2,5$ dB and to the sound pressure level is $K_{pA} = 2,5$ dB. The values are valid for 50 Hz with the refrigerant R404A at the standard rating points according to EN 12900.
 - A-weighted sound power level L_{WA} (re 1 pW), in decibel. To determine the values, measurement methods of the ISO 3740 standard with accuracy class 2 or higher were used .
 - A-weighted sound pressure level L_{pA} (re 20 μ Pa), in decibel. The values are calculated from the sound power level in accordance with ISO 11203: $L_{pA} = L_{WA} - Q_2$ at a distance of $d = 1$ m to the reference box.

Subject to change without notice

To:

From:

14.03.2026
Page 4 of 12

BOCK® HGX44e/770-4

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R513A



Subject:

Performance data table

Application: Refrigeration & AC

Reference temperature: Dew point

Supply frequency: 50 Hz

Voltage: 400 V

Suction gas superheat: 8 K

Subcooling (outside cond.): 0 K

tc [°C]		to [°C]									
		10.0	5.0	0.0	-5.0	-10.0	-15.0	-20.0	-25.0	-30.0	-35.0
10.0	Q [W]									12600	
	P [kW]									4.11	
	I [A]									12.80	
15.0	Q [W]					31900	25300	19800	15200	11500	
	P [kW]					5.66	5.42	5.09	4.68	4.23	
	I [A]					14.20	13.90	13.60	13.30	12.90	
20.0	Q [W]	67300	56000	46000	37300	29900	23600	18300	14000	10500	
	P [kW]	6.05	6.34	6.43	6.35	6.14	5.80	5.38	4.89	4.37	
	I [A]	14.50	14.80	14.90	14.80	14.60	14.30	13.90	13.50	13.00	
25.0	Q [W]	63500	52600	43100	34900	27900	21900	16900	12800	9440	
	P [kW]	7.03	7.18	7.15	6.95	6.62	6.19	5.67	5.10	4.51	
	I [A]	15.50	15.70	15.60	15.40	15.10	14.70	14.20	13.70	13.10	
30.0	Q [W]	59600	49300	40300	32500	25900	20300	15600	11700	8480	
	P [kW]	8.02	8.03	7.86	7.55	7.11	6.57	5.96	5.31	4.64	
	I [A]	16.50	16.60	16.40	16.00	15.60	15.00	14.50	13.80	13.30	
35.0	Q [W]	55700	45900	37400	30100	23900	18600	14300	10600	7560	
	P [kW]	8.99	8.86	8.57	8.13	7.58	6.94	6.23	5.50	4.75	
	I [A]	17.60	17.50	17.10	16.70	16.10	15.40	14.70	14.00	13.40	
40.0	Q [W]	51900	42700	34600	27800	22000	17000	12900	9490	6660	
	P [kW]	9.95	9.67	9.24	8.68	8.02	7.27	6.47	5.65	4.83	
	I [A]	18.70	18.40	17.90	17.30	16.50	15.80	14.90	14.20	13.40	
45.0	Q [W]	48100	39400	31900	25500	20000	15500	11600	8420	5780	
	P [kW]	10.80	10.40	9.89	9.20	8.42	7.56	6.67	5.76	4.85	
	I [A]	19.90	19.30	18.70	17.90	17.00	16.10	15.10	14.30	13.40	
50.0	Q [W]	44300	36100	29100	23100	18100	13900	10400	7380	4910	
	P [kW]	11.70	11.10	10.40	9.66	8.76	7.80	6.81	5.81	4.82	
	I [A]	21.00	20.20	19.40	18.40	17.40	16.30	15.30	14.30	13.40	
55.0	Q [W]	40400	32800	26300	20800	16200	12300	9030	6340	4060	
	P [kW]	12.50	11.80	11.00	10.00	9.04	7.97	6.88	5.78	4.72	
	I [A]	22.00	21.10	20.00	18.90	17.70	16.50	15.30	14.30	13.30	
60.0	Q [W]	36600	29500	23500	18500	14200	10700	7760	5310	3220	
	P [kW]	13.20	12.40	11.40	10.30	9.24	8.06	6.87	5.68	4.53	
	I [A]	23.00	21.90	20.60	19.30	17.90	16.60	15.30	14.20	13.20	
65.0	Q [W]	32800	26200	20700	16100	12300	9120	6490	4280		
	P [kW]	13.90	12.90	11.80	10.60	9.35	8.06	6.76	5.48		
	I [A]	23.90	22.50	21.10	19.50	18.00	16.60	15.20	14.00		
70.0	Q [W]	28900	22900	17900	13800	10400	7540	5220			
	P [kW]	14.40	13.30	12.00	10.70	9.36	7.95	6.55			
	I [A]	24.70	23.10	21.40	19.70	18.00	16.50	15.00			
75.0	Q [W]	25000	19500	15100	11400	8400	5970				
	P [kW]	14.90	13.60	12.20	10.70	9.25	7.73				
	I [A]	25.30	23.50	21.60	19.70	17.90	16.20				

Subject to change without notice

To:

From:

14.03.2026

Page 5 of 12

VAP 11.15.3 – vap.danfoss.com



Subject:

80.0	Q [W]	21000	16200	12200	9010	6460					
	P [kW]	15.20	13.80	12.20	10.60	9.01					
	I [A]	25.80	23.70	21.60	19.60	17.70					

Preliminary capacity data.

Supplementary cooling or reduced suction gas temperature ($\Delta t_{oh} < 20K$)

- t_o* Evaporating temperature
- t_c* Condensing temperature
- Q* Compressor refrigeration capacity
- P* Power consumption
- I* Current draw

Subject:

Scope of supply

Semi-hermetic four-cylinder reciprocating compressor with drive motor
Single-section compressor housing with hermetically integrated electric motor

Rear bearing flange prepared for oil differential pressure sensor DELTA-P II

Winding protection with PTC resistor sensors and electronic trigger unit INT69 G
115-230 V AC, 50/60 Hz, IP00

Oil pump

Possibility of connection of oil level controllers ESK, AC+R or CARLY

Possibility of connection of oil level controllers Traxoil ¹⁾

Possibility for connection of oil pressure safety switch MP54

Oil charge:
HG: **BOCK**lub A46
HGX: **BOCK**lub E55

Sight glass

Pressure relief valve

Suction and discharge line valve

Inert gas charge

Accessories

(Digital) capacity regulator DCR14 230 V - 1 - 50/60 Hz, IP65
possible equipment see Capacity regulator 09900-DGbF

Cylinder cover prepared for digital capacity regulator

Oil sump heater 230 V - 1 - 50/60 Hz, 160 W

USB converter for INT69 G Diagnose ²⁾

Intermediate flange for discharge line valve on right or left seen from oil pump

INT69 GTML Diagnose 115-230 V AC, 50/60 Hz, IP00, including oil differential pressure sensor INT250G,
thermal protection thermostat per cylinder covers, (INT69 G not applicable) ²⁾

INT69 G Diagnose 115-230 V AC, 50/60 Hz, IP00 (INT69 G not applicable)

Oil pressure safety switch MP54 230 V - 1 - 50/60 Hz, IP20 ²⁾

Oil differential pressure sensor DELTA-P II 220-240 V - 1 - 50/60 Hz ³⁾

Connection piece suction and discharge valve in welding design

Thermal protection thermostat per cylinder cover

Subject to change without notice



Subject:

Oil temperature sensor (Pt1000, for external evaluation) ²⁾

Hot gas temperature sensor (Pt1000, for external evaluation) ⁴⁾

Thermal protection thermostat per cylinder cover

Additional fan
230 V AC - 1 - 50 Hz, 97 W, IP44
230 V AC - 1 - 60 Hz, 128 W ²⁾

Step protection

Injection nozzle for liquid injection ²⁾

4 anti-vibration pads enclosed

Special voltage and/or frequency (on request)

-
- 1) Only with additional adapter possible
 - 2) Enclosure
 - 3) Enclosure (screw-in part mounted)
 - 4) Mounted

BOCK® HGX44e/770-4
Engine: 380-420V Y/YY -3- 50Hz PW
Refrigerant: R513A



Subject:

Dimensions and connections

Subject to change without notice


To:

From:

14.03.2026
Page 9 of 12

VAP 11.15.3 – vap.danfoss.com

Subject:

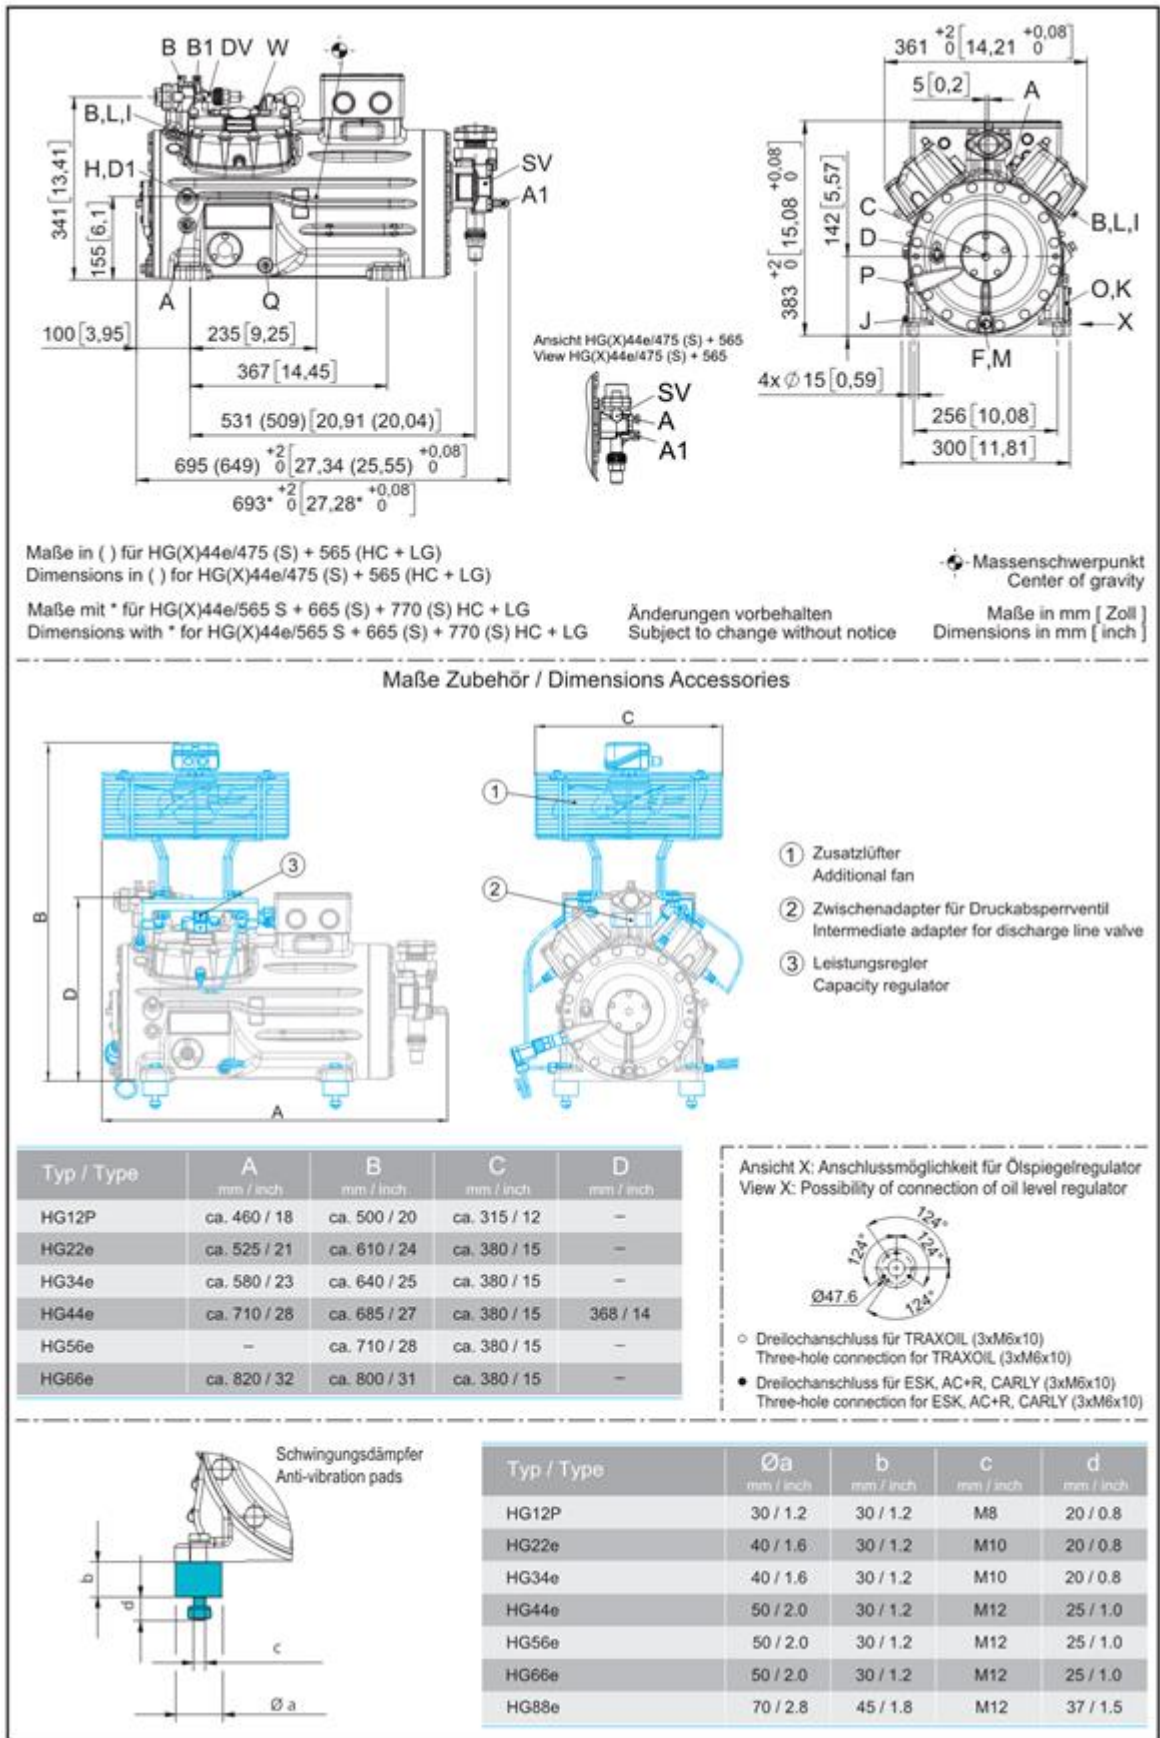

subject to change without notice

To:

From:



Subject:

SV	Suction line valve, tube \varnothing ¹⁾	42 mm - 1 5/8 "
DV	Discharge line valve, tube \varnothing ¹⁾	28 mm - 1 1/8 "
A	Connection suction side, not lockable	1/8 " NPTF
A1	Connection suction side, lockable	7/16 " UNF
B	Connection discharge side, not lockable	1/8 " NPTF
B1	Connection discharge side, lockable	7/16 " UNF
C	Connection oil pressure safety switch OIL	1/8 " NPTF
D	Connection oil pressure safety switch LP	7/16 " UNF
D1	Connection oil return from oil separator	1/4 " NPTF
F	Oil drain	M 12 x 1.5
H	Oil charge plug	1/4 " NPTF
I	Connection hot gas temperature sensor	1/8 " NPTF
J	Connection oil sump heater	3/8 " NPTF
K	Sight glass	3 x M 6
L	Connection thermal protection thermostat	1/8 " NPTF
M	Oil strainer	M 12 x 1.5
O	Connection oil level regulator	3 x M 6
P	Connection oil differential pressure sensor	M 20 x 1.5
Q	Connection oil temperature sensor	1/8" NPTF
W	Connection for refrigerant injection	1/8" NPTF

1) Brazing connection

BOCK® HGX44e/770-4
Engine: 380-420V Y/YY -3- 50Hz PW
Refrigerant: R513A



Subject:

Product photo



Subject to change without notice

To:

From:

14.03.2026
Page 12 of 12

VAP 11.15.3 – vap.danfoss.com