



Subject:

Performance data

Application: Refrigeration & AC


| | | | |
|------------------------------------|------------------|--------------------------------------|-----------------------|
| Refrigerant | R513A | Compressor refrigeration capacity | 40.40 kW |
| Reference temperature | Dew point | Evaporator refrigeration capacity | 40.40 kW |
| Power supply | 50 Hz, 400 V | Power consumption | 16.80 kW |
| Supply frequency | 50 Hz | Current draw (400 V) | 33.30 A |
| Evaporating temperature | -10.0 °C | Coefficient of performance (COP/EER) | 2.40 |
| <i>Evaporating pressure (abs.)</i> | <i>2.23 bar</i> | Condensing capacity | 57.20 kW |
| Condensing temperature | 45.0 °C | Mass flow | 0.345 kg/s |
| <i>Condensing pressure (abs.)</i> | <i>12.17 bar</i> | Discharge end temperature | 66.2 °C ¹⁾ |
| Suction gas superheat | 8 K | | |
| Subcooling (outside cond.) | 0 K | | |
| Usable superheat | 100% | | |

Preliminary capacity data.

-
- 1) The stated value of the discharge end temperature is a mere calculated value. Additional cooling and heat dissipation are not considered. Deviations (particularly in deep freezing applications) from the real measured discharge temperature during operation are possible.

Subject:

Operating limits

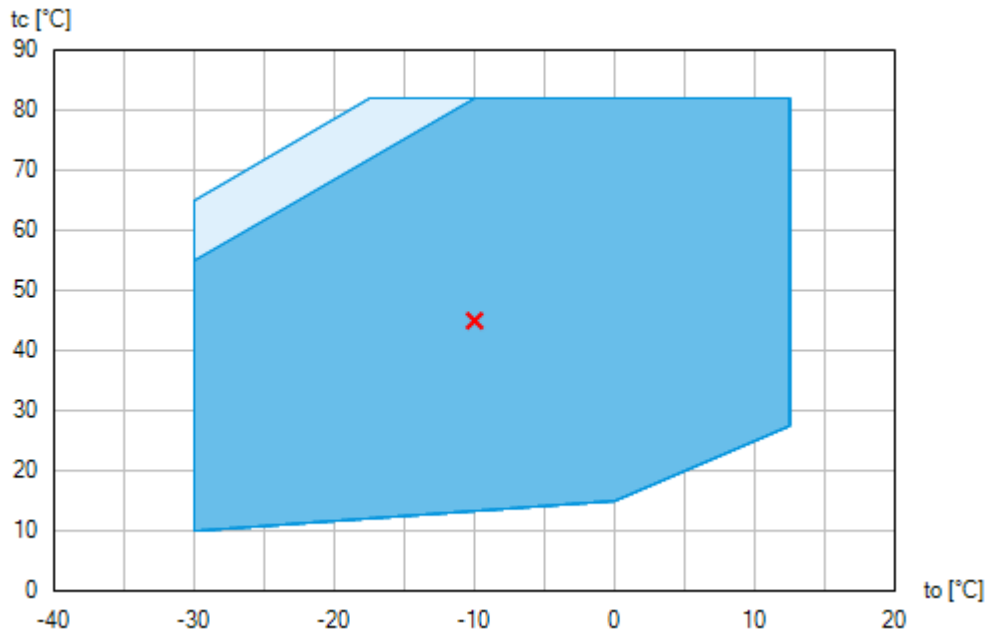

-  Unlimited application range
-  Supplementary cooling or reduced suction gas temperature ($\Delta t_{oh} < 20K$)

Compressor operation is possible within the limits shown on the diagrams of application. Please note the coloured areas. Compressor application limits should not be chosen for design purposes or continuous operation. Axis values refer to dew point (saturated vapour line).

Subject:

Technical data

| | |
|--|---------------------------------|
| Number of cylinders / Bore / Stroke | 6 / 75 mm / 58 mm |
| Displacement 50/60 Hz (1450/1740 ¹ /min) | 133,8 / 160,5 m ³ /h |
| Voltage ¹⁾ | 380-420V Y/YY -3- 50Hz PW |
| | 440-480V Y/YY -3- 60Hz PW |
| Winding divided into | 50% / 50% |
| Max. working current ²⁾ | 62.1 A |
| Max. power consumption ²⁾ | 37.2 kW |
| Starting current (rotor blocked) ²⁾ | 170.0 / 275.0 A |
| Motor protection | INT69 G |
| Protection terminal box | IP 66 |
| Weight | 280 kg |
| Frequency range ³⁾ | 25 - 60 Hz |
| Max. permissible overpressure (g) (LP/HP) ⁴⁾ | 19 / 28 bar |
| Connection suction line SV | 54 mm - 2 1/8 " |
| Connection discharge line DV | 42 mm - 1 5/8 " |
| Lubrication | Oil pump |
| Oil type R134a, R404A, R407A/C/F, R448A, R449A, R450A, R513A | BOCKlub E55 |
| Oil type R22 | BOCKlub A46 |
| Oil charge | 4,4 Ltr. |
| Oil sump heater | 230 V - 1 - 50/60 Hz, 160 W |
| Dimensions Length / Width / Height | 810 / 557 / 467 mm |
| Sound power level L _{WA} ⁵⁾ | 88 dB(A) @ -35 °C / +40 °C |
| | 82 dB(A) @ -10 °C / +45 °C |
| Sound pressure level L _{pA} ⁵⁾ | 74 dB(A) @ -35 °C / +40 °C |
| | 69 dB(A) @ -10 °C / +45 °C |

1) Tolerance (± 10%) relates to the mean value of the voltage range. Other voltages and current types on request

All data are based on voltage rms values

PW = part winding, motors for part winding starting
 (no start unloaders required)
 Designs for Y/D on request

Subject to change without notice



Subject:

- 2) - The stated value for the max. power consumption is valid for the adjusted power supply.
 - Starting current (rotor blocked):
 - Part winding (PW) motors: Winding 1 / Winding 1+2
 - Delta/Star (Δ/Y) motors: Δ / Y
 - Take account of the max. operating current / max. power consumption for designing motor contractors, feed lines, fuses and motor protection switches. Motor contractors: Consumption category AC3.
- 3) The maximum permissible working current of the compressor (I_{max}) must not be exceeded. Take account of the guidelines for use of frequency inverter (see compressor assembly instruction or selection software).
- 4) LP = Low pressure
HP = High pressure
- 5) Declared dual-number noise emission values are in accordance with ISO 4871. The corresponding uncertainty to the sound power level is $K_{WA} = 2,5$ dB and to the sound pressure level is $K_{pA} = 2,5$ dB. The values are valid for 50 Hz with the refrigerant R404A at the standard rating points according to EN 12900.
 - A-weighted sound power level L_{WA} (re 1 pW), in decibel. To determine the values, measurement methods of the ISO 3740 standard with accuracy class 2 or higher were used .
 - A-weighted sound pressure level L_{pA} (re 20 μ Pa), in decibel. The values are calculated from the sound power level in accordance with ISO 11203: $L_{pA} = L_{WA} - Q_2$ at a distance of $d = 1$ m to the reference box.



Subject:

Performance data table

Application: Refrigeration & AC
 Reference temperature: Dew point
 Supply frequency: 50 Hz
 Voltage: 400 V
 Suction gas superheat: 8 K
 Subcooling (outside cond.): 0 K

| tc [°C] | | to [°C] | | | | | | | | | |
|---------|--------------------------|--------------------------|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|------------------------|-------|
| | | 10.0 | 5.0 | 0.0 | -5.0 | -10.0 | -15.0 | -20.0 | -25.0 | -30.0 | -35.0 |
| 10.0 | Q [W] P [kW] I [A] | | | | | | | | | 25000 8.44 25.10 | |
| 15.0 | Q [W] P [kW] I [A] | | | 96200 12.50 28.70 | 78500 12.40 28.60 | 63100 12.00 28.20 | 50000 11.30 27.60 | 39100 10.50 26.90 | 30200 9.60 26.10 | 23100 8.64 25.30 | |
| 20.0 | Q [W] P [kW] I [A] | | 112000 13.90 30.20 | 91700 13.90 30.20 | 74500 13.60 29.80 | 59700 12.90 29.20 | 47200 12.00 28.30 | 36600 11.00 27.30 | 28000 9.92 26.30 | 21200 8.82 25.40 | |
| 25.0 | Q [W] P [kW] I [A] | 128000 15.60 31.90 | 106000 15.70 32.10 | 86800 15.40 31.70 | 70300 14.70 31.00 | 56100 13.80 30.10 | 44100 12.70 28.90 | 34000 11.50 27.80 | 25800 10.20 26.60 | 19200 8.99 25.50 | |
| 30.0 | Q [W] P [kW] I [A] | 121000 17.60 34.20 | 99800 17.40 34.00 | 81700 16.80 33.30 | 65900 15.80 32.20 | 52400 14.70 30.90 | 40900 13.30 29.60 | 31300 11.90 28.20 | 23400 10.50 26.80 | 17200 9.13 25.70 | |
| 35.0 | Q [W] P [kW] I [A] | 114000 19.50 36.50 | 93500 19.00 35.90 | 76300 18.10 34.80 | 61300 16.80 33.40 | 48400 15.40 31.80 | 37600 13.90 30.10 | 28500 12.30 28.50 | 21100 10.70 27.00 | 15200 9.23 25.70 | |
| 40.0 | Q [W] P [kW] I [A] | 106000 21.40 38.80 | 87100 20.50 37.70 | 70700 19.30 36.20 | 56500 17.80 34.50 | 44400 16.10 32.60 | 34200 14.40 30.70 | 25800 12.60 28.80 | 18900 10.90 27.20 | 13400 9.29 25.80 | |
| 45.0 | Q [W] P [kW] I [A] | 98200 23.10 41.10 | 80400 21.90 39.50 | 65000 20.40 37.60 | 51700 18.70 35.50 | 40400 16.80 33.30 | 30900 14.80 31.10 | 23100 12.90 29.10 | 16700 11.00 27.30 | 11700 9.29 25.80 | |
| 50.0 | Q [W] P [kW] I [A] | 90400 24.70 43.30 | 73600 23.20 41.20 | 59200 21.40 38.90 | 46800 19.40 36.40 | 36300 17.30 33.90 | 27600 15.20 31.50 | 20500 13.00 29.30 | 14700 11.00 27.30 | 10100 9.22 25.70 | |
| 55.0 | Q [W] P [kW] I [A] | 82400 26.20 45.40 | 66700 24.40 42.80 | 53300 22.30 40.10 | 41900 20.10 37.20 | 32300 17.70 34.40 | 24400 15.40 31.70 | 18000 13.10 29.40 | 12800 11.00 27.30 | 8750 9.08 25.60 | |
| 60.0 | Q [W] P [kW] I [A] | 74300 27.50 47.30 | 59800 25.40 44.30 | 47400 23.10 41.10 | 37000 20.60 37.90 | 28400 18.10 34.80 | 21300 15.50 31.90 | 15600 13.10 29.40 | 11100 10.80 27.20 | 7620 8.85 25.40 | |
| 65.0 | Q [W] P [kW] I [A] | 66100 28.70 49.00 | 52800 26.30 45.60 | 41600 23.70 42.00 | 32200 21.00 38.40 | 24500 18.30 35.00 | 18400 15.60 31.90 | 13500 13.00 29.20 | 9620 10.60 27.00 | 6740 8.53 25.20 | |
| 70.0 | Q [W] P [kW] I [A] | 57900 29.80 50.60 | 45800 27.10 46.60 | 35800 24.20 42.60 | 27500 21.30 38.80 | 20900 18.30 35.10 | 15600 15.50 31.80 | 11500 12.80 29.00 | 8380 10.30 26.70 | | |
| 75.0 | Q [W] P [kW] I [A] | 49800 30.70 51.90 | 38900 27.70 47.50 | 30100 24.60 43.10 | 23000 21.40 38.90 | 17400 18.30 35.00 | 13100 15.20 31.60 | 9780 12.40 28.60 | | | |

Subject to change without notice



Subject:

| | | | | | | | | | | | |
|------|--------|-------|-------|-------|-------|-------|-------|--|--|--|--|
| 80.0 | Q [W] | 41600 | 32200 | 24600 | 18700 | 14200 | 10800 | | | | |
| | P [kW] | 31.40 | 28.10 | 24.80 | 21.40 | 18.10 | 14.90 | | | | |
| | I [A] | 53.00 | 48.10 | 43.40 | 38.90 | 34.80 | 31.20 | | | | |

Preliminary capacity data.

Supplementary cooling or reduced suction gas temperature ($\Delta t_{oh} < 20K$)

- t_o* Evaporating temperature
- t_c* Condensing temperature
- Q* Compressor refrigeration capacity
- P* Power consumption
- I* Current draw

Subject:

Scope of supply

Semi-hermetic six-cylinder reciprocating compressor with drive motor for part winding start
Single-section compressor housing with hermetically integrated electric motor

Rear bearing flange prepared for oil differential pressure sensor DELTA-P II

Winding protection with PTC resistor sensors and electronic trigger unit INT69 G
115-230 V AC, 50/60 Hz, IP00

Oil pump

Possibility of connection of oil level controllers ESK, AC+R or CARLY

Possibility of connection of oil level controllers Traxoil ¹⁾

Oil charge:
HG: **BOCK**lub A46
HGX: **BOCK**lub E55

Sight glass

Internal safety valve

Suction and discharge line valve

Inert gas charge

Accessories

Capacity regulator 110 V - 1 - 50/60 Hz, IP65
1-2 capacity regulator = 66/33% residual capacity ²⁾

Capacity regulator 230 V - 1 - 50/60 Hz, IP65
1-2 capacity regulator = 66/33% residual capacity ²⁾

Cylinder cover prepared for capacity regulator ³⁾

Oil sump heater 230 V - 1 - 50/60 Hz, 160 W ³⁾

USB converter for INT69 G Diagnose ⁴⁾

Oil service valve

INT69 G Diagnose 115-230 V AC, 50/60 Hz, IP00 (INT69 G not applicable) ³⁾

Oil pressure safety switch MP54 230 V - 1 - 50/60 Hz, IP20 ⁴⁾

INT69 GTML Diagnose 115-230 V AC, 50/60 Hz, IP00, including oil differential pressure sensor INT250G,
thermal protection thermostat per cylinder covers, (INT69 G not applicable) ⁴⁾

Thermal protection thermostat per cylinder cover ³⁾

Oil differential pressure sensor DELTA-P II 220-240 V - 1 - 50/60 Hz ⁴⁾

Subject to change without notice



Subject:

Connection piece suction and discharge valve in welding design

Oil temperature sensor (Pt1000, for external evaluation) ³⁾

Hot gas temperature sensor (Pt1000, for external evaluation) ³⁾

Thermal protection thermostat per cylinder cover

Additional fan

230 V AC - 1 - 50 Hz, 97 W, IP44

230 V AC - 1 - 60 Hz, 128 W ⁴⁾

Step protection ⁴⁾

Injection nozzle for liquid injection ⁴⁾

4 anti-vibration pads enclosed

Special voltage and/or frequency (on request)

-
- 1) Only with additional adapter possible
 - 2) Capacity regulator premounted, control unit enclosed
 - 3) Mounted
 - 4) Enclosure

BOCK® HGX66e/1540-4
Engine: 380-420V Y/YY -3- 50Hz PW
Refrigerant: R513A



Subject:

Dimensions and connections

Subject to change without notice

To:

From:


14.03.2026
Page 9 of 12

VAP 11.15.3 – vap.danfoss.com

Subject:




Maße Zubehör / Dimensions Accessories

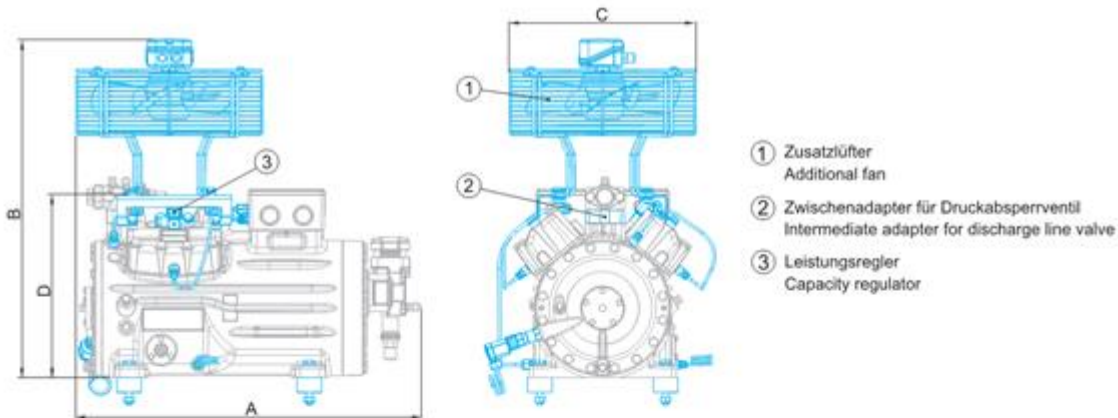

| Typ / Type | A mm / inch | B mm / inch | C mm / inch | D mm / inch |
|------------|----------------|----------------|----------------|----------------|
| HG12P | ca. 460 / 18 | ca. 500 / 20 | ca. 315 / 12 | - |
| HG22e | ca. 525 / 21 | ca. 610 / 24 | ca. 380 / 15 | - |
| HG34e | ca. 580 / 23 | ca. 640 / 25 | ca. 380 / 15 | - |
| HG44e | ca. 710 / 28 | ca. 685 / 27 | ca. 380 / 15 | ca. 368 / 14 |
| HG56e | - | ca. 710 / 28 | ca. 380 / 15 | - |
| HG66e | ca. 820 / 32 | ca. 800 / 31 | ca. 380 / 15 | - |

Ansicht X: Anschlussmöglichkeit für Ölspiegelregulator
 View X: Possibility of connection of oil level regulator

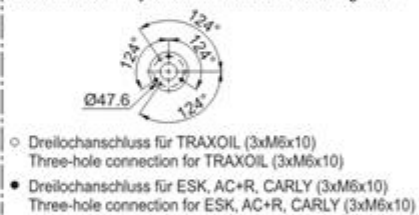

| Typ / Type | Øa mm / inch | b mm / inch | c mm / inch | d mm / inch |
|------------|-----------------|----------------|----------------|----------------|
| HG12P | 30 / 1.2 | 30 / 1.2 | M8 | 20 / 0.8 |
| HG22e | 40 / 1.6 | 30 / 1.2 | M10 | 20 / 0.8 |
| HG34e | 40 / 1.6 | 30 / 1.2 | M10 | 20 / 0.8 |
| HG44e | 50 / 2.0 | 30 / 1.2 | M12 | 25 / 1.0 |
| HG56e | 50 / 2.0 | 30 / 1.2 | M12 | 25 / 1.0 |
| HG66e | 50 / 2.0 | 30 / 1.2 | M12 | 25 / 1.0 |
| HG88e | 70 / 2.8 | 45 / 1.8 | M12 | 37 / 1.5 |

ange without notice



Subject:

| | | |
|----|--|-----------------|
| SV | Suction line valve, tube \varnothing ¹⁾ | 54 mm - 2 1/8 " |
| DV | Discharge line valve, tube \varnothing ¹⁾ | 42 mm - 1 5/8 " |
| A | Connection suction side, not lockable | 1/8 " NPTF |
| A1 | Connection suction side, lockable | 7/16 " UNF |
| B | Connection discharge side, not lockable | 1/8 " NPTF |
| B1 | Connection discharge side, lockable | 7/16 " UNF |
| C | Connection oil pressure safety switch OIL | 1/8 " NPTF |
| D | Connection oil pressure safety switch LP | 7/16 " UNF |
| D1 | Connection oil return from oil separator | 1/4 " NPTF |
| F | Oil drain | M 12 x 1.5 |
| H | Oil charge plug | 1/4 " NPTF |
| I | Connection hot gas temperature sensor | 1/8 " NPTF |
| J | Connection oil sump heater | 3/8 " NPTF |
| K | Sight glass | 3 x M 6 |
| L | Connection thermal protection thermostat | 1/8 " NPTF |
| M | Oil strainer | M 12 x 1.5 |
| O | Connection oil level regulator | 3 x M 6 |
| ÖV | Connection oil service valve | 1/4 " NPTF |
| P | Connection oil differential pressure sensor | M 20 x 1.5 |
| Q | Connection oil temperature sensor | 1/8" NPTF |
| W | Connection for refrigerant injection | 2 x 1/8" NPTF |

1) Brazing connection

BOCK® HGX66e/1540-4
Engine: 380-420V Y/YY -3- 50Hz PW
Refrigerant: R513A



Subject:

Product photo



Subject to change without notice

To:

From:

14.03.2026
Page 12 of 12

VAP 11.15.3 – vap.danfoss.com