

BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A



Subject:

Performance data

Application: Refrigeration & AC

Refrigerant	R449A	Compressor refrigeration capacity	7.92 kW
Reference temperature	Dew point	Evaporator refrigeration capacity	7.92 kW
Power supply	50 Hz, 400 V	Power consumption	3.50 kW
Supply frequency	50 Hz	Current draw (400 V)	6.13 A
Evaporating temperature	-10.0 °C	Coefficient of performance (COP/EER)	2.26
<i>Evaporating pressure (abs.)</i>	<i>3.58 bar</i>	Condensing capacity	11.50 kW
Condensing temperature	45.0 °C	Mass flow	0.057 kg/s
<i>Condensing pressure (abs.)</i>	<i>18.75 bar</i>	Discharge end temperature	84.4 °C ¹⁾
Suction gas superheat	8 K		
Subcooling (outside cond.)	0 K		
Usable superheat	100%		

Preliminary capacity data.

-
- 1) The stated value of the discharge end temperature is a mere calculated value. Additional cooling and heat dissipation are not considered. Deviations (particularly in deep freezing applications) from the real measured discharge temperature during operation are possible.

Subject to change without notice

To:

From:

14.03.2026
Page 1 of 12

VAP 11.15.3 – vap.danfoss.com

BOCK® HGX22e/190-4


Engine: 220-240V Δ / 380-420V Y -3- 50Hz



Refrigerant: R449A



Subject:

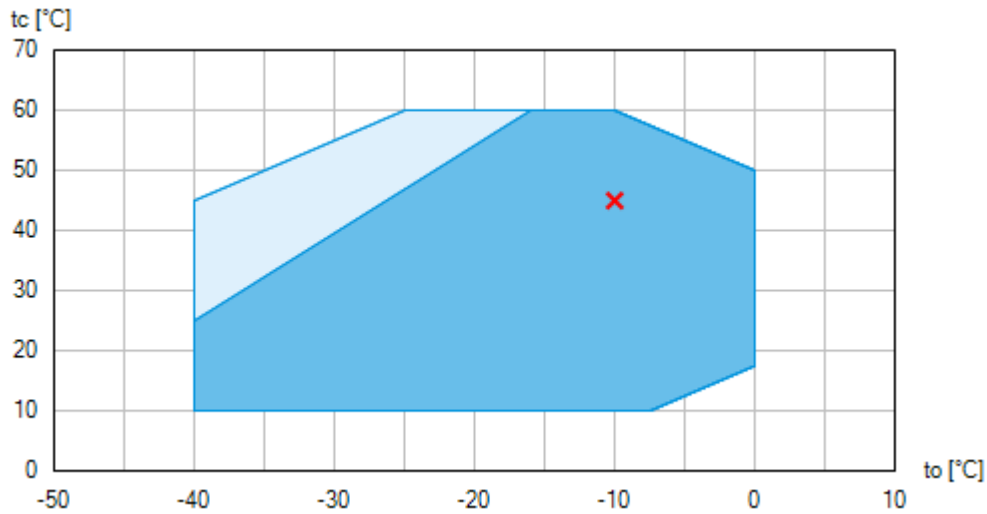Operating limits



-  Unlimited application range
-  Supplementary cooling or reduced suction gas temperature ($\Delta t_{oh} < 20K$)

Compressor operation is possible within the limits shown on the diagrams of application. Please note the coloured areas. Compressor application limits should not be chosen for design purposes or continuous operation. Axis values refer to dew point (saturated vapour line).

Subject to change without notice

To:

From:

14.03.2026
Page 2 of 12

VAP 11.15.3 – vap.danfoss.com

BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A



Subject:

Technical data

Number of cylinders / Bore / Stroke	2 / 55 mm / 40 mm
Displacement 50/60 Hz (1450/1740 ¹ /min)	16,50 / 19,80 m ³ /h
Voltage ¹⁾	220-240V Δ / 380-420V Y -3- 50Hz
	265-290V Δ / 440-480V Y -3- 60Hz
Max. working current ²⁾	13.8 / 8.0 A
Max. power consumption ²⁾	4.8 kW
Starting current (rotor blocked) ²⁾	69.0 / 40.0 A
Motor protection	INT69 G
Protection terminal box	IP 66
Weight	73 kg
Frequency range ³⁾	30 -70 Hz
Max. permissible overpressure (g) (LP/HP) ⁴⁾	19 / 28 bar
Connection suction line SV	22 mm - 7/8 "
Connection discharge line DV	16 mm - 5/8 "
Lubrication	Oil pump
Oil type R134a, R404A, R407A/C/F, R448A, R449A, R450A, R513A	BOCKlub E55
Oil type R22	BOCKlub A46
Oil charge	1,1 Ltr.
Dimensions Length / Width / Height	468 / 240 / 315 mm
Sound power level L _{WA} ⁵⁾	70 dB(A) @ -35 °C / +40 °C
	69 dB(A) @ -10 °C / +45 °C
Sound pressure level L _{pA} ⁵⁾	58 dB(A) @ -35 °C / +40 °C
	57 dB(A) @ -10 °C / +45 °C

1) Tolerance (± 10%) relates to the mean value of the voltage range. Other voltages and current types on request

All data are based on voltage rms values

2) - The stated value for the max. power consumption is valid for the adjusted power supply.

- Starting current (rotor blocked):

- Part winding (PW) motors: Winding 1 / Winding 1+2
- Delta/Star (Δ/Y) motors: Δ / Y

- Take account of the max. operating current / max. power consumption for designing motor contractors, feed lines, fuses and motor protection switches. Motor contractors: Consumption category AC3.

3) The maximum permissible working current of the compressor (I_{max}) must not be exceeded. Take account of the guidelines for use of frequency inverter (see compressor assembly instruction or selection software).

Subject to change without notice

To:

From:

14.03.2026

Page 3 of 12

VAP 11.15.3 – vap.danfoss.com

BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A



Subject:

- 4) LP = Low pressure
HP = High pressure
- 5) Declared dual-number noise emission values are in accordance with ISO 4871. The corresponding uncertainty to the sound power level is $K_{WA} = 2,5$ dB and to the sound pressure level is $K_{pA} = 2,5$ dB. The values are valid for 50 Hz with the refrigerant R404A at the standard rating points according to EN 12900.
 - A-weighted sound power level L_{WA} (re 1 pW), in decibel. To determine the values, measurement methods of the ISO 3740 standard with accuracy class 2 or higher were used .
 - A-weighted sound pressure level L_{pA} (re 20 μ Pa), in decibel. The values are calculated from the sound power level in accordance with ISO 11203: $L_{pA} = L_{WA} - Q_2$ at a distance of $d = 1$ m to the reference box.

Subject to change without notice

To:

From:

14.03.2026
Page 4 of 12

VAP 11.15.3 – vap.danfoss.com

BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A



Subject:

Performance data table

Application: Refrigeration & AC

Reference temperature: Dew point

Supply frequency: 50 Hz

Voltage: 400 V

Suction gas superheat: 8 K

Subcooling (outside cond.): 0 K

tc [°C]		to [°C]									
		0.0	-5.0	-10.0	-15.0	-20.0	-25.0	-30.0	-35.0	-40.0	-45.0
10.0	Q [W]			12900	10400	8180	6390	4920	3720	2740	
	P [kW]			2.07	2.01	1.92	1.80	1.65	1.48	1.27	
	I [A]			4.24	4.17	4.07	3.95	3.80	3.64	3.46	
15.0	Q [W]		15100	12300	9800	7780	6090	4700	3560	2610	
	P [kW]		2.35	2.28	2.17	2.05	1.90	1.73	1.54	1.32	
	I [A]		4.58	4.48	4.36	4.22	4.06	3.88	3.69	3.50	
20.0	Q [W]	17400	14200	11600	9250	7350	5760	4450	3360	2450	
	P [kW]	2.72	2.61	2.49	2.35	2.19	2.01	1.82	1.60	1.36	
	I [A]	5.03	4.90	4.74	4.57	4.38	4.18	3.97	3.75	3.54	
25.0	Q [W]	16300	13400	10900	8690	6900	5410	4170	3130	2250	
	P [kW]	3.02	2.87	2.70	2.52	2.33	2.12	1.90	1.66	1.41	
	I [A]	5.45	5.24	5.01	4.78	4.54	4.30	4.05	3.81	3.58	
30.0	Q [W]	15300	12500	10200	8100	6430	5030	3860	2880	2030	
	P [kW]	3.33	3.13	2.91	2.69	2.46	2.22	1.97	1.71	1.44	
	I [A]	5.89	5.60	5.30	5.01	4.71	4.42	4.13	3.86	3.61	
35.0	Q [W]	14300	11600	9380	7510	5940	4630	3530	2600	1790	
	P [kW]	3.64	3.38	3.12	2.86	2.59	2.32	2.04	1.76	1.46	
	I [A]	6.33	5.96	5.59	5.23	4.87	4.53	4.21	3.90	3.63	
40.0	Q [W]	13200	10800	8650	6900	5450	4230	3200	2310	1520	
	P [kW]	3.93	3.63	3.32	3.01	2.71	2.40	2.09	1.78	1.47	
	I [A]	6.77	6.32	5.87	5.44	5.02	4.63	4.27	3.93	3.63	
45.0	Q [W]	12200	9850	7920	6300	4950	3810	2850	2010	1250	
	P [kW]	4.22	3.86	3.50	3.15	2.81	2.46	2.13	1.79	1.45	
	I [A]	7.20	6.66	6.13	5.63	5.15	4.71	4.30	3.94	3.62	
50.0	Q [W]	11200	8980	7190	5690	4450	3400	2500	1710		
	P [kW]	4.49	4.07	3.67	3.27	2.88	2.51	2.13	1.77		
	I [A]	7.60	6.98	6.37	5.80	5.26	4.76	4.31	3.92		
55.0	Q [W]		8120	6470	5100	3950	2990	2160			
	P [kW]		4.26	3.81	3.36	2.94	2.52	2.12			
	I [A]		7.27	6.58	5.93	5.33	4.78	4.29			
60.0	Q [W]			5760	4510	3470	2590				
	P [kW]			3.92	3.43	2.96	2.50				
	I [A]			6.75	6.03	5.36	4.76				

Preliminary capacity data.



Supplementary cooling or reduced suction gas temperature ($\Delta t_{oh} < 20K$)

Subject to change without notice

To:

From:

14.03.2026

Page 5 of 12

VAP 11.15.3 – vap.danfoss.com

BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A



Subject:

- t_o* Evaporating temperature
- t_c* Condensing temperature
- Q* Compressor refrigeration capacity
- P* Power consumption
- I* Current draw

Subject to change without notice

To:

From:

14.03.2026
Page 6 of 12

VAP 11.15.3 – vap.danfoss.com

BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A



Subject:

Scope of supply

Semi-hermetic two cylinder reciprocating compressor with drive motor
Single-section compressor housing with hermetically integrated electric motor

Winding protection with PTC resistor sensors and electronic trigger unit INT69 G
115-230 V AC, 50/60 Hz, IP00

Oil pump

Possibility for connection of oil pressure safety switch MP55

Possibility of connection of oil level controllers ESK, Traxoil, AC+R or CARLY ¹⁾

Oil charge:

HG: **BOCK**lub A46

HGX: **BOCK**lub E55

Sight glass

Suction and discharge line valve

Inert gas charge

Accessories

Oil sump heater

110-240 V - 1 - 50/60 Hz, 50-120 W, IP66

PTC heater self-regulating

Oil pressure safety switch MP55 230 V - 1 - 50/60 Hz, IP20 ²⁾

USB converter for INT69 G Diagnose ²⁾

INT69 G Diagnose 115-230 V AC, 50/60 Hz, IP00 (INT69 G not applicable)

Thermal protection thermostat per cylinder cover ³⁾

Hot gas temperature sensor (Pt1000, for external evaluation) ³⁾

Thermal protection thermostat per cylinder cover

Additional fan

230 V AC - 1 - 50 Hz, 97 W, IP44

230 V AC - 1 - 60 Hz, 128 W ²⁾

4 anti-vibration pads enclosed

Special voltage and/or frequency (on request)

1) Only with additional adapter possible

2) Enclosure

BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A



Subject:

3) Mounted

Subject to change without notice

To:

From:

14.03.2026
Page 8 of 12

VAP 11.15.3 – vap.danfoss.com

BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A



Subject:

Dimensions and connections

Subject to change without notice

To:

From:

14.03.2026
Page 9 of 12

VAP 11.15.3 – vap.danfoss.com


BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A



Subject:

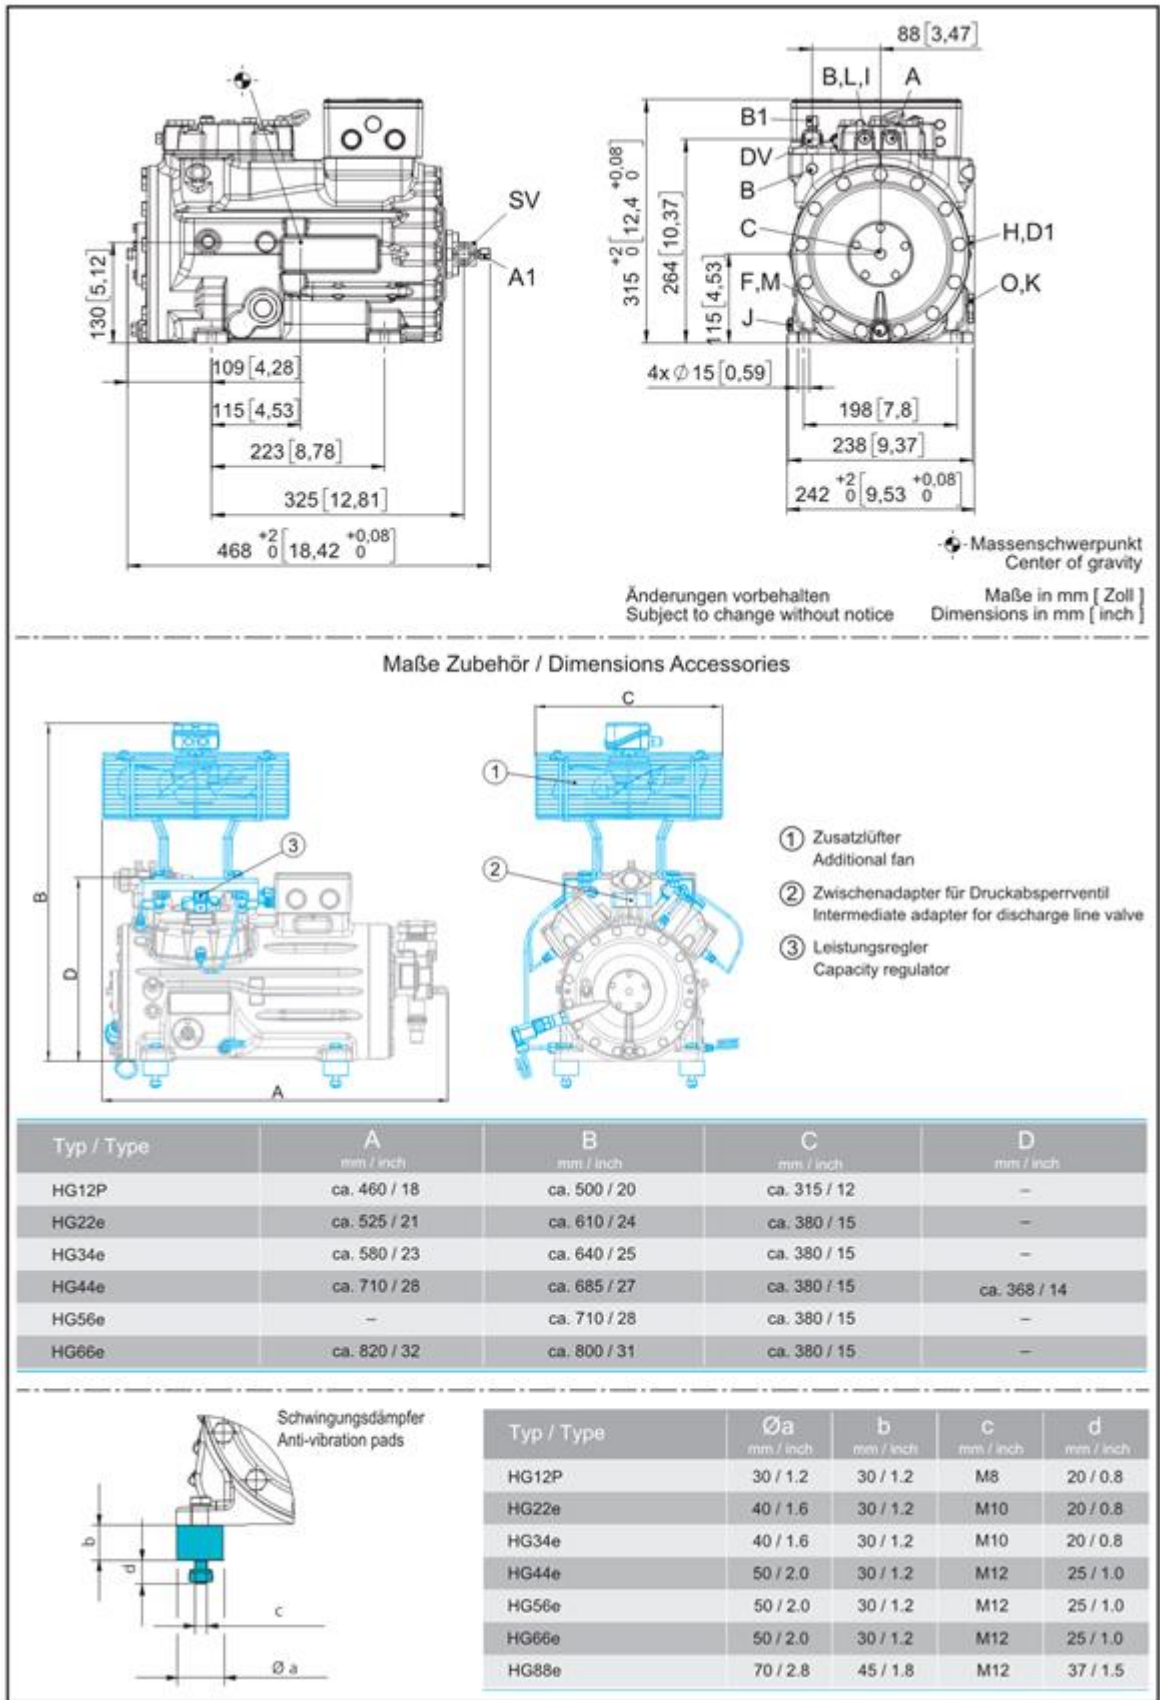

Subject to change without notice

To:

From:

14.03.2026
Page 10 of 12

VAP 11.15.3 – vap.danfoss.com

BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A

**Subject:**

SV	Suction line valve, tube \varnothing ¹⁾	22 mm - 7/8 "
DV	Discharge line valve, tube \varnothing ¹⁾	16 mm - 5/8 "
A	Connection suction side, not lockable	1/8 " NPTF
A1	Connection suction side, lockable	7/16 " UNF
B	Connection discharge side, not lockable	1/8 " NPTF
B1	Connection discharge side, lockable	7/16 " UNF
C	Connection oil pressure safety switch OIL	1/8 " NPTF
D1	Connection oil return from oil separator	1/4 " NPTF
F	Oil drain	M 12 x 1.5
H	Oil charge plug	1/4 " NPTF
I	Connection hot gas temperature sensor	1/8 " NPTF
J	Connection oil sump heater	3/8 " NPTF
K	Sight glass	1 1/8 " - 18 UNEF
L	Connection thermal protection thermostat	1/8 " NPTF
M	Oil strainer	M 12 x 1.5
O	Connection oil level regulator	1 1/8 " - 18 UNEF

1) Brazing connection

Subject to change without notice

To:

From:

14.03.2026
Page 11 of 12VAP 11.15.3 – vap.danfoss.com

BOCK® HGX22e/190-4

Engine: 220-240V Δ / 380-420V Y -3- 50Hz

Refrigerant: R449A



Subject:

Product photo



Subject to change without notice

To:

From:

14.03.2026
Page 12 of 12

VAP 11.15.3 – vap.danfoss.com