

Copeland Stream semi-hermetic reciprocating compressors with Compressor Electronics for HFC / HFO blends


Stream series 4 and 6 cylinder compressors provide best-in-class performance, thereby significantly reducing the cost of operation and environmental impact compared to competing products. They are equipped with Copeland compressor electronics technology, featuring a modular design using state-of-the-art electronics (p.92). With advanced protection and diagnostics features for system reliability, reduced service costs and increased equipment uptime, Stream series is built to last in today's modern changing world.

Copeland Stream compressors are now qualified for low GWP refrigerants classified A2L, such as R454A, R454C and R455A.



Copeland Stream compressor

Stream compressor line-up

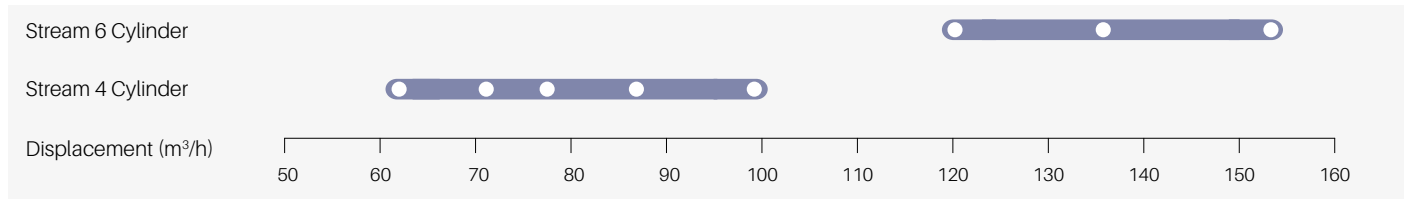



Features and benefits

- Range of 16 models from 62 to 153m³/h
- Best-in-class seasonal efficiencies, up to 15% higher than market standard
- Multi-refrigerant compressor, compatible with R407A/F/C, R448A/ R449A, R404A, R134a, R450A, R513A, R454A, R454C and R455A.
- Stepless capacity modulation by means of inverter or digital modulation
- Wide operating envelope covering low- and medium-temperature refrigeration without cooling fan
- Reduced sound level, dimensions and weight by up to 45 kg
- Option to use compressors with additional demand cooling function in order to achieve extended low temperature operating envelope without any superheat restriction for new refrigerants R407A/F, R448A and R449A



Copeland Compressor Electronics Technology features

- Motor and oil protection
- Storage of compressor asset and advanced runtime information
- Runtime/alarm signalling using multi-colour LED flash-codes
- Communication to system controller via Bluetooth or Modbus®
- Individual compressor power monitoring



Operating envelope R454A

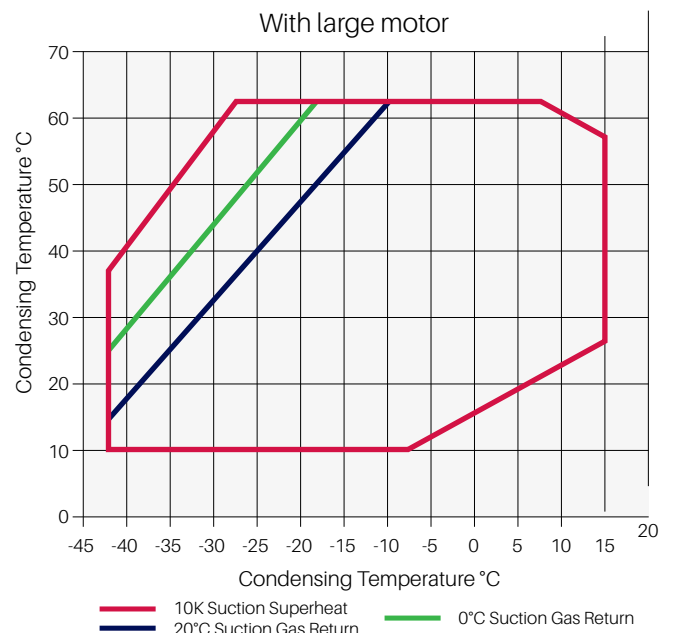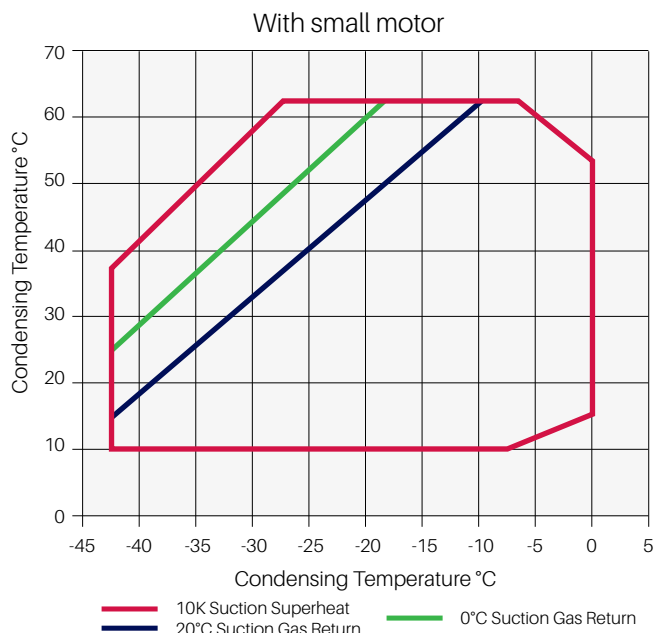



Operating envelope R454C

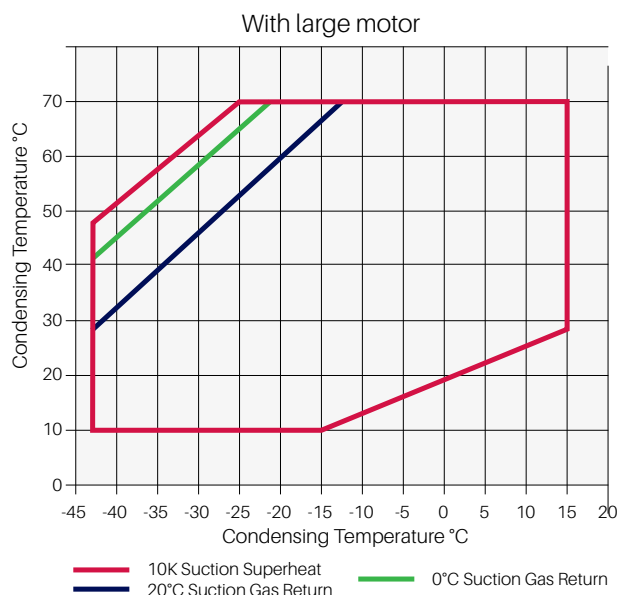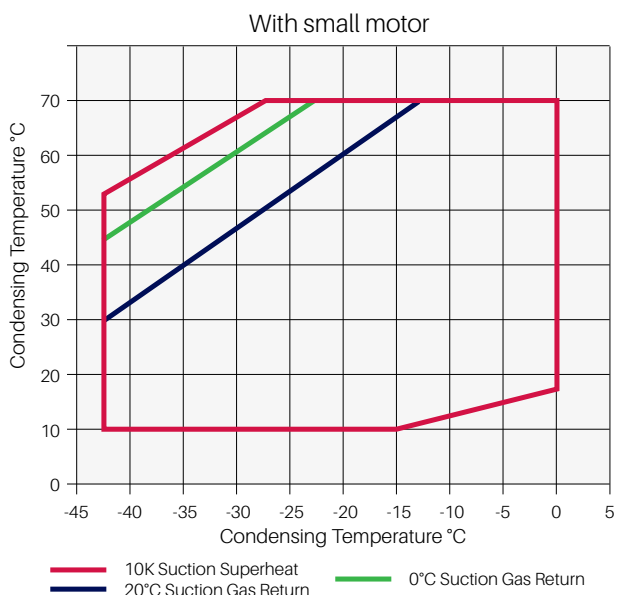

Operating envelope R455A

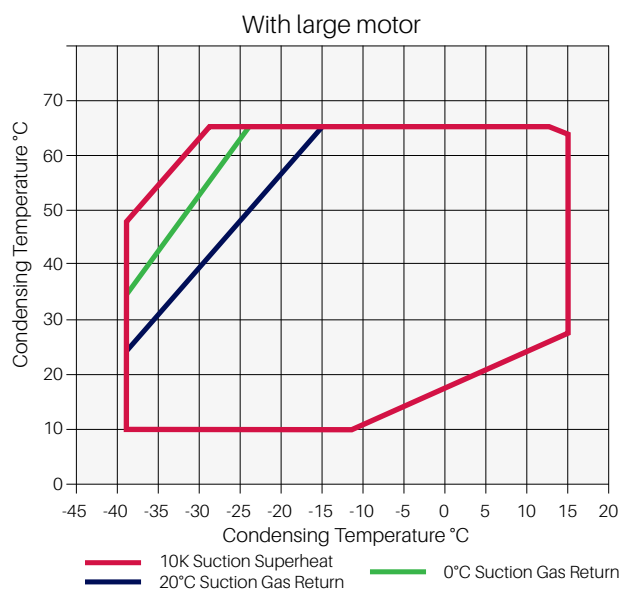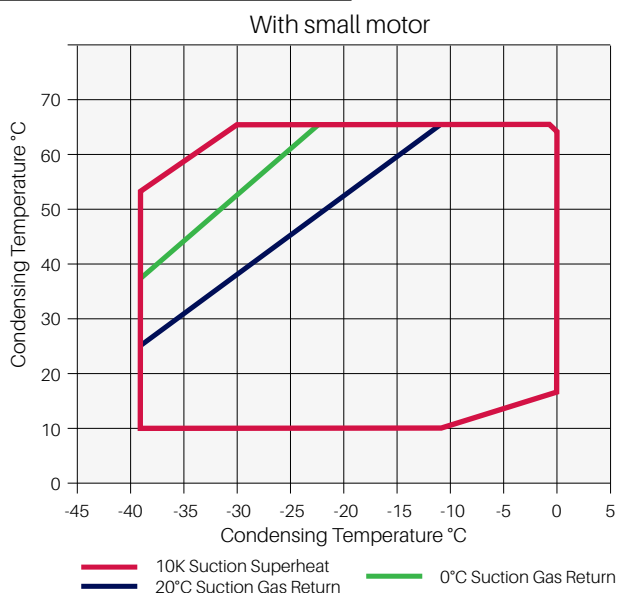

Operating envelope R448A/R449A

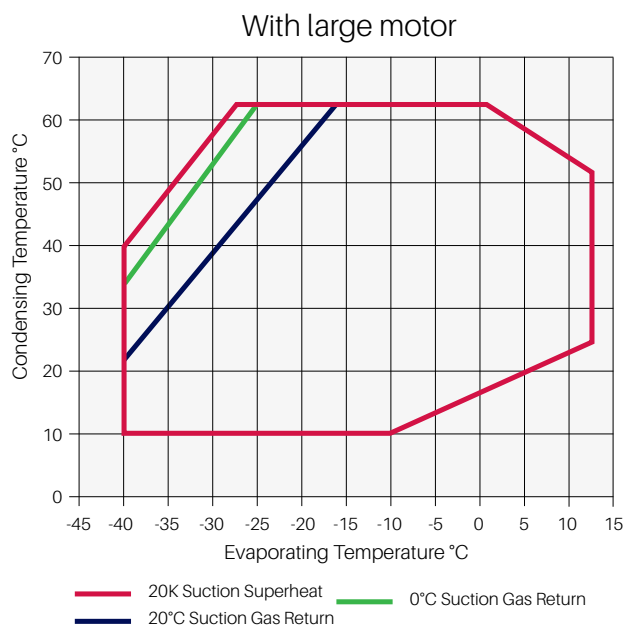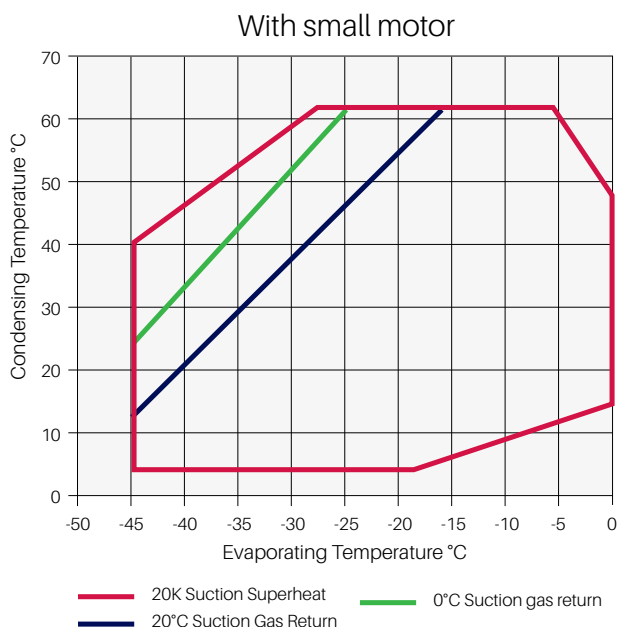

Technical overview

Models	Nominal hp	Displacement (m ³ /h)	Oil Quantity (l)	Length/width/height (mm)	Net Weight (kg)	Motor Version/ Code	Maximum Operating Current (A)	Locked Rotor Current (A)	Sound Pressure @1 m - dB(A) ***
						3 Ph**	3 Ph**	3 Ph**	
4MF-13	13	61.7	3.3	638/501/452	177	AWM	30.8	105	70
4MA-22	22	61.7	3.3	638/501/452	177	AWM	36.3	175	75
4ML-15	15	71.4	3.3	638/501/452	180	AWM	35.4	156	71
4MH-25	25	71.4	3.3	657/501/452	187	AWM	41.6	199	75
4MM-20	17	78.2	3.3	657/501/452	182	AWM	39.0	175	71
4MI-30	27	78.2	3.3	657/501/452	188	AWM	46.6	221	75
4MT-22	22	87.7	3.3	657/501/452	183	AWM	44.5	175	73
4MJ-33	33	87.7	3.3	657/501/452	190	AWM	52.9	221	74
4MU-25	25	99.4	3.3	657/501/452	186	AWM	51.9	199	72
4MK-35	32	99.4	3.3	688/501/452	202	AWM	61.1	255	74
6MM-30	27	120.5	3.3	695/547/450	215	AWM	59.7	255	78
6MI-40	35	120.5	3.3	695/547/450	219	AWM	71.4	304	78
6MT-35	32	135.0	3.3	725/547/450	221	AWM	67.3	255	77
6MJ-45	40	135.0	3.3	725/547/450	223	AWM	81.5	304	79
6MU-40	40	153.0	3.3	757/547/450	225	AWM	75.8	306	78
6MK-50	50	153.0	3.3	773/547/450	230	AWM	92.9	393	80

** 3 Ph: 380-420V/ 50Hz

*** @ 1m: sound pressure level at 1m distance from the compressor, free field condition

Capacity data

Condensing Temperature: 40°C															
R454A	Cooling Capacity (kW)							R454A	Power Input (kW)						
	Evaporating Temperature (°C)								Evaporating Temperature (°C)						
Model	-45	-35	-30	-20	-10	-5	+5	Model	-45	-35	-30	-20	-10	-5	+5
4MF-13		8.8*	12.2*	21.8	33.4	40.5		4MF-13		7.0*	8.2*	8.2	12.6	13.5	
4MA-22		9.1*	12.6*	22.4	34.8	42.7	62.3	4MA-22		7.1*	8.2*	8.2	12.4	13.3	14.3
4ML-15		11.1*	15.0*	26.2	40.2	49.0		4ML-15		8.5*	9.9*	9.9	14.9	15.9	
4MH-25		10.8*	14.7*	26.2	40.6	49.7	72.0	4MH-25		8.1*	9.5*	9.5	14.5	15.4	16.6
4MM-20		12.5*	16.7*	28.9	44.4	54.3		4MM-20		9.5*	11.0*	11.0	16.5	17.7	
4MI-30		12.0*	16.5*	29.1	44.7	54.4	78.2	4MI-30		9.2*	10.8*	10.8	16.2	17.3	18.8
4MT-22		13.8*	18.4*	31.8	48.5	59.0		4MT-22		10.9*	12.6*	12.6	18.9	20.2	
4MJ-33		13.5*	18.8*	33.1	50.5	61.4	88.1	4MJ-33		10.3*	12.1*	12.1	18.3	19.5	21.3
4MU-25		15.6*	20.9*	36.3	55.5	67.6		4MU-25		12.0*	13.9*	13.9	21.3	23.0	
4MK-35		15.7*	21.2*	36.9	56.4	68.7	99.4	4MK-35		12.0*	13.9*	13.9	21.1	22.6	24.9
6MM-30		18.9*	25.4*	44.4	67.7	82.1		6MM-30		14.5*	16.8*	16.8	25.5	27.3	
6MI-40		18.3*	25.0*	44.2	68.0	83.0	120.5	6MI-40		14.2*	16.6*	16.6	25.1	26.8	29.2
6MT-35		22.0*	28.4*	49.6	76.0	92.5	133.5	6MT-35		16.6*	18.6*	18.6	28.3	30.2	33.0
6MJ-45		21.1*	29.1*	49.7	75.4	91.5		6MJ-45		16.0*	19.1*	19.1	28.9	30.9	
6MU-40		23.3*	31.3*	54.9	83.4	101.0		6MU-40		18.0*	20.9*	20.9	32.4	34.8	
6MK-50		23.3*	31.3*	54.7	83.8	102.0	148.0	6MK-50		18.5*	21.2*	21.2	31.8	34.0	37.3

Conditions: Suction Gas Return 20°C / Subcooling 0K, 100% loaded

*Conditions: Suction Superheat 10K, Subcooling 0K

Preliminary data

Condensing Temperature: 40°C															
R454C	Cooling Capacity (kW)							R454C	Power Input (kW)						
	Evaporating Temperature (°C)								Evaporating Temperature (°C)						
Model	-45	-35	-30	-20	-10	-5	+5	Model	-45	-35	-30	-20	-10	-5	+5
4MF-13		7.3*	11.3	18.9	29.4	36.0		4MF-13		5.7*	6.7	8.6	10.3	11.1	
4MA-22		6.9*	11.2	19.3	30.4	37.4	54.3	4MA-22		5.7*	6.8	8.7	10.4	11.0	11.8
4ML-15		8.5*	13.2	21.8	33.9	41.4	-	4ML-15		6.9*	8.0	10.2	12.2	13.1	-
4MH-25		8.3*	12.9	21.6	34.0	41.8	61.2	4MH-25		6.6*	7.7	10.0	12.0	12.8	13.9
4MM-20		9.7*	14.7	24.1	37.3	45.6	-	4MM-20		7.7*	8.9	11.3	13.6	14.5	-
4MI-30		9.1*	14.4	24.1	37.6	46.1	66.8	4MI-30		7.5*	8.8	11.3	13.4	14.3	15.6
4MT-22		10.4*	15.9	26.0	40.2	49.0	-	4MT-22		8.7*	10.2	13.0	15.6	16.7	-
4MJ-33		10.2*	16.2	27.5	42.7	52.1	75.0	4MJ-33		8.4*	9.9	12.8	15.2	16.2	17.7
4MU-25		11.9*	18.3	30.3	46.9	57.2	-	4MU-25		9.8*	11.4	14.6	17.7	19.1	-
4MK-35		11.9*	18.6	30.8	47.6	58.1	84.2	4MK-35		9.7*	11.4	14.6	17.3	18.5	20.5
6MM-30		14.5*	22.2	36.8	57.1	69.7	-	6MM-30		11.7*	13.6	17.4	20.9	22.5	-
6MI-40		14.2*	22.0	36.7	57.2	70.0	102.0	6MI-40		11.7*	13.6	17.4	20.8	22.2	24.3
6MT-35		17.1*	25.5	41.5	63.7	77.6	-	6MT-35		13.5*	15.5	19.8	23.7	25.4	-
6MJ-45		16.2*	24.7	40.8	63.4	77.6	113.0	6MJ-45		13.0*	15.1	19.4	23.3	24.9	27.2
6MU-40		17.6*	27.1	44.7	69.4	84.7	-	6MU-40		14.6*	17.0	21.9	26.7	28.7	-
6MK-50		17.5*	27.2	45.0	70.1	85.8	124.5	6MK-50		15.1*	17.3	22.0	26.3	28.2	31.1

Conditions: Suction Gas Return 20°C / Subcooling 0K, 100% loaded

*Conditions: Suction Superheat 10K, Subcooling 0K

Preliminary data

Capacity data

Condensing Temperature: 40°C															
R455A	Cooling Capacity (kW)							R455A	Power Input (kW)						
	Evaporating Temperature (°C)								Evaporating Temperature (°C)						
Model	-45	-35	-30	-20	-10	-5	+5	Model	-45	-35	-30	-20	-10	-5	+5
4MF-13		7.4	10.4*	19.4	30.1	36.7		4MF-13		7.4	7.1*	9.2	11.1	11.9	
4MA-22		7.1	11.7	20.1	31.7	38.9	56.5	4MA-22		7.1	7.2	9.4	11.2	11.9	12.8
4ML-15		9.5	13.0*	23.6	36.7	44.9		4ML-15		9.5	8.6*	11.0	13.1	14.1	
4MH-25		9.2	14.1	23.6	37.1	45.6	66.6	4MH-25		9.2	8.2	10.7	12.8	13.7	14.9
4MM-20		10.7	14.6*	26.1	40.4	49.5		4MM-20		10.7	9.5*	12.1	14.6	15.6	
4MI-30		10.3	16.0	26.8	41.4	50.5	72.7	4MI-30		10.3	9.4	12.1	14.4	15.3	16.8
4MT-22		11.5	15.6*	28.2	43.6	53.2		4MT-22		11.5	10.9*	13.9	16.7	17.9	
4MJ-33		11.3	17.7	29.8	46.4	56.6	81.4	4MJ-33		11.3	10.6	13.6	16.2	17.3	19.0
4MU-25		13.4	18.5*	33.3	51.3	62.6		4MU-25		13.4	12.2*	15.6	19.0	20.5	
4MK-35		13.1	20.1	33.5	51.9	63.3	91.5	4MK-35		13.1	12.1	15.5	18.5	19.8	22.0
6MM-30		16.4	22.3*	40.4	62.6	76.3		6MM-30		16.4	14.6*	18.7	22.5	24.1	
6MI-40		15.4	23.5	39.0	60.8	74.6	109.0	6MI-40		15.4	14.5	18.6	22.2	23.8	26.1
6MT-35		18.9	25.4*	45.1	69.1	84.1		6MT-35		18.9	16.6*	21.2	25.5	27.3	
6MJ-45		18.2	27.1	44.6	69.3	84.9	123.5	6MJ-45		18.2	16.1	20.8	25.0	26.7	29.3
6MU-40		20.2	27.4*	49.8	77.2	94.2		6MU-40		20.2	18.1*	23.5	28.6	30.8	
6MK-50		19.9	30.2	50.0	77.8	95.3	138.5	6MK-50		19.9	18.5	23.5	28.2	30.2	33.4

Conditions: Suction Gas Return 20°C / Subcooling OK, 100% loaded

*Conditions: Suction Superheat 10K, Subcooling OK

Preliminary data

Condensing Temperature 40°C															
R448A/ R449A	Cooling Capacity (kW)							R448A/ R449A	Power Input (kW)						
	Evaporating Temperature (°C)								Evaporating Temperature (°C)						
Model	-45	-35	-30	-20	-10	-5	5	Model	-45	-35	-30	-20	-10	-5	5
4MA-22		7.8*	11.3*	21.2	34.3	42.7	63.5	4MA-22		6.2*	7.4*	9.8	11.8	12.6	13.7
4MF-13	3.8*	8.2*	11.1*	19.6	30.4	37.3		4MF-13	4.5*	6.3*	7.4*	9.8	12.2	13.1	
4MH-25		9.4*	13.5*	24.7	39.1	48.0	70.3	4MH-25		7.6*	8.9*	11.6	14.1	15.1	16.7
4ML-15	4.3*	10.5*	14.3*	25.2	38.7	47.1		4ML-15	5.2*	7.6*	8.9*	11.6	14.2	15.4	
4MI-30		10.8*	15.4*	28.1	44.1	54.0	78.6	4MI-30		8.2*	9.8*	13.0	15.6	16.7	18.2
4MM-20	4.9*	11.8*	16.0*	27.8	42.5	51.5		4MM-20	5.8*	8.5*	9.9*	12.9	15.6	16.9	
4MJ-33		12.1*	17.0*	30.9	48.7	59.8	87.6	4MJ-33		9.2*	11.0*	14.5	17.6	18.9	20.6
4MT-22	5.9*	13.5*	18.2*	31.3	47.7	57.8		4MT-22	6.6*	9.7*	11.3*	14.6	17.8	19.2	
4MK-35		13.7*	19.2*	34.7	54.8	67.5	98.9	4MK-35		10.7*	12.7*	16.7	20.4	22.0	24.4
4MU-25	6.5*	14.3*	19.5*	34.2	53.2	65.1		4MU-25	7.4*	10.8*	12.7*	16.6	20.5	22.4	
6MI-40		17.1*	23.9*	42.8	66.6	81.4	118.0	6MI-40		13.0*	15.3*	19.6	23.5	25.2	28.0
6MM-30	6.6*	17.6*	24.1*	41.8	63.2	76.3		6MM-30	8.8*	13.1*	15.4*	19.9	23.9	25.6	
6MT-35	7.5*	19.8*	26.9*	46.5	70.0	84.3		6MT-35	9.7*	14.6*	17.2*	22.2	26.9	29.0	
6MJ-45		19.5*	27.2*	48.1	74.5	91.0	132.0	6MJ-45		14.3*	17.0*	22.2	26.9	28.8	31.7
6MK-50		21.1*	29.4*	52.7	82.2	101.0	147.0	6MK-50		16.4*	19.2*	25.0	30.3	32.7	36.7
6MU-40	8.3*	22.2*	30.5*	53.4	81.8	99.4		6MU-40	10.9*	16.3*	19.1*	24.6	29.8	32.1	

Conditions: Suction Gas Return 20°C / Subcooling OK

* Conditions: Suction Superheat 10K, Subcooling OK

Preliminary Data