


50 Hz

ZB45KCE-TFD

R449A Dew Point

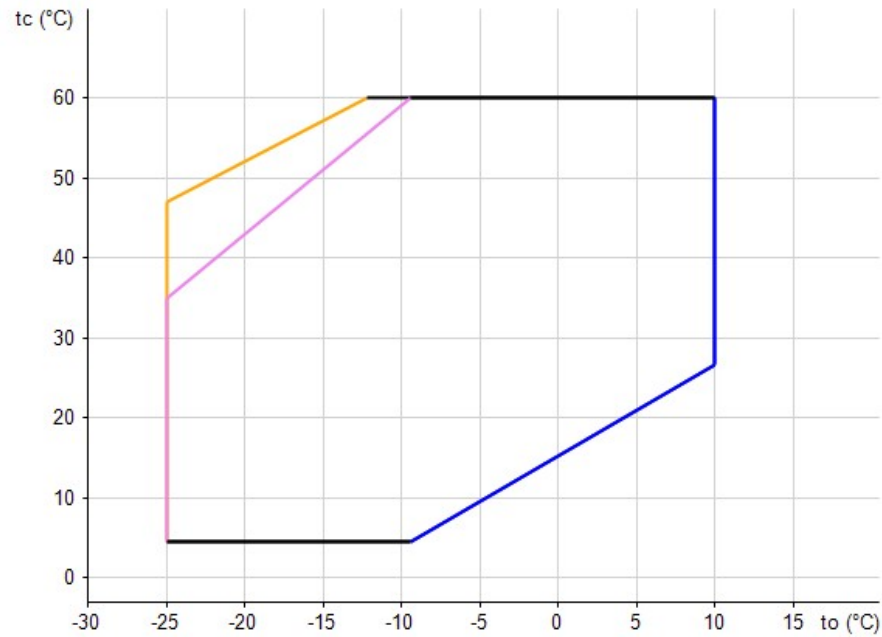

Minimum Evaporating Temp. With:

- 20 °C Suction Gas Return ASERCOM certified
- 10 K Suction Superheat
- Maximum Evaporating Temperature

Suction Return Temperature 18.3°C

Liquid Subcooling 0.0K

Evaporating Temperature, °C

Cond °C	Cooling Capacity, kW								
	-25.0	-20.0	-15.0	-10.0	-5.0	0.0	5.0	7.0	10.0
4.0	7.45	9.27	11.35	13.75					
5.0	7.44	9.27	11.35	13.75					
10.0	7.32	9.16	11.20	13.60	16.40				
15.0	7.09	8.93	10.95	13.30	16.05				
20.0	6.76	8.59	10.60	12.90	15.55	18.65			
25.0	6.34	8.17	10.15	12.40	14.95	17.95	21.50	23.10	
30.0	5.88	7.68	9.63	11.80	14.30	17.20	20.60	22.10	24.50
35.0	5.37	7.15	9.05	11.15	13.55	16.30	19.55	21.00	23.40
40.0		6.60	8.43	10.45	12.75	15.40	18.50	19.85	22.10
45.0			7.81	9.74	11.90	14.45	17.35	18.70	20.80
50.0			7.19	9.03	11.10	13.45	16.25	17.45	19.50
55.0				8.33	10.25	12.50	15.10	16.25	18.15
60.0					9.48	11.55	13.95	15.05	16.85

50 Hz

ZB45KCE-TFD

R449A Dew Point

Cond °C	Power, kW								
	-25.0	-20.0	-15.0	-10.0	-5.0	0.0	5.0	7.0	10.0
4.0	1.74	1.82	1.90	1.99					
5.0	1.76	1.83	1.91	2.00					
10.0	1.89	1.94	2.01	2.07	2.15				
15.0	2.08	2.13	2.17	2.22	2.28				
20.0	2.33	2.36	2.39	2.43	2.47	2.54			
25.0	2.64	2.66	2.68	2.70	2.73	2.78	2.85	2.89	
30.0	3.00	3.01	3.02	3.04	3.06	3.09	3.15	3.18	3.23
35.0	3.41	3.42	3.42	3.43	3.44	3.46	3.51	3.53	3.58
40.0		3.88	3.88	3.88	3.88	3.90	3.93	3.95	3.99
45.0			4.39	4.38	4.38	4.39	4.42	4.43	4.47
50.0			4.94	4.94	4.94	4.94	4.96	4.98	5.01
55.0				5.55	5.54	5.55	5.57	5.58	5.60
60.0					6.20	6.21	6.23	6.24	6.26

Cond °C	Current at 400 V, A								
	-25.0	-20.0	-15.0	-10.0	-5.0	0.0	5.0	7.0	10.0
4.0	7.35	7.41	7.39	7.34					
5.0	7.30	7.36	7.35	7.30					
10.0	6.98	7.07	7.07	7.05	7.05				
15.0	6.82	6.93	6.95	6.95	6.96				
20.0	6.83	6.95	6.98	6.98	7.01	7.10			
25.0	6.99	7.11	7.14	7.15	7.17	7.27	7.50	7.63	
30.0	7.30	7.41	7.44	7.44	7.45	7.55	7.76	7.90	8.16
35.0	7.75	7.85	7.86	7.84	7.85	7.92	8.13	8.26	8.51
40.0		8.40	8.40	8.36	8.34	8.40	8.58	8.70	8.94
45.0			9.04	8.97	8.93	8.95	9.10	9.21	9.43
50.0			9.79	9.69	9.60	9.59	9.71	9.80	10.00
55.0				10.48	10.36	10.30	10.37	10.44	10.62
60.0					11.18	11.07	11.09	11.14	11.29

50 Hz

ZB45KCE-TFD

R449A Dew Point

Cond °C	Suction Mass Flow, g/s								
	-25.0	-20.0	-15.0	-10.0	-5.0	0.0	5.0	7.0	10.0
4.0	33.30	41.70	51.20	62.50					
5.0	33.40	41.80	51.40	62.70					
10.0	34.00	42.70	52.60	64.10	77.80				
15.0	34.10	43.10	53.30	65.00	78.90				
20.0	33.70	43.00	53.40	65.40	79.40	96.10			
25.0	32.90	42.60	53.20	65.30	79.50	96.30	116.50	125.50	
30.0	31.80	41.70	52.60	64.90	79.10	96.10	116.50	125.50	140.50
35.0	30.40	40.60	51.70	64.10	78.50	95.50	116.00	125.00	140.50
40.0		39.30	50.60	63.10	77.60	94.60	115.00	124.50	140.00
45.0			49.30	62.00	76.50	93.60	114.00	123.50	139.00
50.0			48.10	60.80	75.40	92.60	113.00	122.50	138.50
55.0				59.90	74.50	91.70	112.50	122.00	137.50
60.0					73.90	91.20	112.00	121.50	137.50

COMPRESSOR MECHANICAL AND PHYSICAL DATA

Displacement @ 50 Hz, m³/h	17.1
Length/Width, mm	242/242
Height, mm	438
Net Weight, kg	39.1
Rotalock Suction, inch	1 1/4
Rotalock Discharge, inch	1
Oil Quantity, l	1.9
Oil type (original charge)	POE RL32-3MAF
Oil type (approved oils)	POE RL32-3MAF, POE MOBIL EAL Arctic 22 CC
Base mounting (hole dia), mm	190 x 190 (8.5)
Sound Pressure @ 1m (MT), dBA	65
Sound Power (MT), dBA	76
Sound Conditions (MT, Temperatures: Evap./Cond./Suction at freq./speed)	-10 / 45 / 20 °C at 50 Hz
PED Category	1
Max. Internal Free Volume, l	5.90
High Side PS gauge, bar	32
Low Side PS gauge, bar	21
Low Side TS Max., °C	50
Low Side TS Min., °C	-35
Refrigerant's GWP	1397
Refrigerant's classification	A1

COMPRESSOR ELECTRICAL DATA (380-420 V / 3~ / 50 Hz)

Maximum Operating Current, A	13.1
Locked Rotor Current, A	74
Winding Resistance, ohm	2.27
Default Enclosure Class	IP 21 (IEC 34)

ACCESSORIES INCLUDED

Discharge Temperature Protection	Internal Thermodisk
Mounting Grommets	Standard

ACCESSORIES OPTIONAL

Crankcase Heater	70 W External
Oil Control System	ALCO Trax-Oil OM3
Sound Attenuation	Sound Shell (10dBA)
Rotalock valves	suction and discharge

MOTOR OPTIONS

<i>Motor Code</i>	<i>Power Supply</i>	<i>Nominal Voltage, V</i>	<i>Start Connection</i>	<i>DOL Connection</i>	<i>Amps Factor</i>
TFD	380-420 V / 3~ / 50 Hz	400		Y	1.00
TF5	200-220 V / 3~ / 50 Hz	200		Y	2.09
TFD	460 V / 3~ / 60 Hz	460		Y	1.04
TF5	200-230 V / 3~ / 60 Hz	230		Y	2.09