


Vibration absorber with Copper connection (VASC) & Stainless Steel connection (VASS)

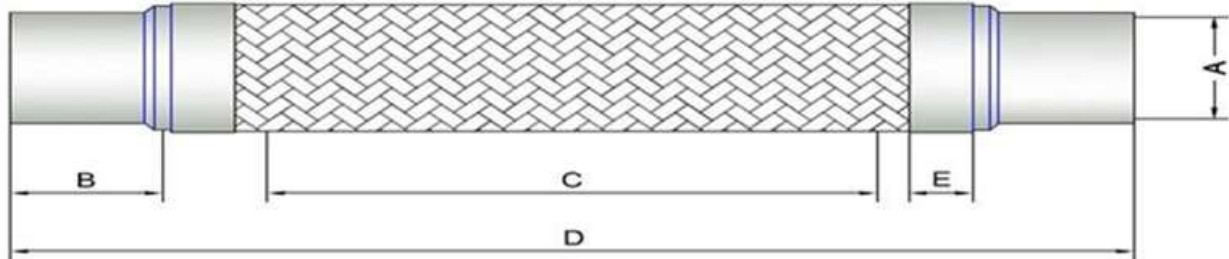

Material Specification

Corrugated Tube	Wire Braid	Grooved Ferrule	Ferrule	Tube End
304 Stainless Steel	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel	Copper

Dimension Specification

Model No.	Actual OD of Copper tubing (inch)	Dimensions (mm)					Max Working Pressure (bar)	Burst Pressure (bar)	Weight (kg)
		A (I.D)	B (±3)	C (±3)	D (±6)	E (±1.5)			
VASC-014	1/4"	6.7	17	133	202	10	45	180	0.12
VASC-038	3/8"	9.6	18	141	215	10	45	180	0.12
VASC-012	1/2"	12.8	18	151	225	10	45	180	0.14
VASC-058	5/8"	16.2	20	169	247	10	45	180	0.2
VASC-034	3/4"	19.2	23	180	266	11	45	180	0.285
VASC-078	7/8"	22.5	25	211	301	11	45	180	0.305
VASC-118	1-1/8"	28.8	32	223	329	12	45	180	0.435
VASC-138	1-3/8"	35.3	35	274	392	14	45	180	0.645
VASC-158	1-5/8"	41.7	40	295	425	16	45	180	0.895
VASC-218	2-1/8"	54.5	50	370	520	16	38	152	1.38
VASC-258	2-5/8"	67.0	60	434	613	19	35	140	2.37
VASC-318	3-1/8"	79.6	70	481	680	19	35	140	3.43
VASC-358	3-5/8"	92.5	85	579	812	21	25	100	4.4
VASC-418	4-1/8"	104.9	90	589	832	21	25	100	5.12

Model No.	Actual OD of Copper tubing (metric)	Dimensions (mm)					Max Working Pressure (bar)	Burst Pressure (bar)	Weight
		A (I.D)	B (±3)	C (±3)	D (±6)	E (±1.5)			
VASC-6mm	6mm	6.7	17	133	202	10	45	180	0.12
VASC-10mm	10mm	10.2	18	141	215	10	45	180	0.12
VASC-12mm	12mm	12.2	18	151	225	10	45	180	0.14
VASC-16mm	16mm	16.2	20	169	247	10	45	180	0.2
VASC-18mm	18mm	18.3	23	180	266	11	45	180	0.285
VASC-22mm	22mm	22.5	25	211	301	11	45	180	0.305
VASC-28mm	28mm	28.3	32	223	329	12	45	180	0.435
VASC-35mm	35mm	35.3	35	274	392	14	45	180	0.645
VASC-42mm	42mm	42.5	40	295	425	16	45	180	0.895
VASC-54mm	54mm	54.5	50	370	520	16	38	152	1.38
VASC-64mm	64mm	64.5	60	434	613	19	35	140	2.37
VASC-76mm	76mm	76.5	70	481	680	19	35	140	3.43
VASC-89mm	89mm	89.5	85	579	812	21	25	100	4.4
VASC-108mm	108mm	108.5	90	589	832	21	25	100	5.12

Notes:

1. OEM making is available, Any dimension can be produced upon request.
2. Stainless Steel Vibration Absorbers are also available.
3. Metric size Vibration Eliminators is available.